


PARAGON BIN STATION

Assembly Instructions



Register your Paragon bin station at
www.paragon-outdoor.com
for an extra 1 year of coverage!

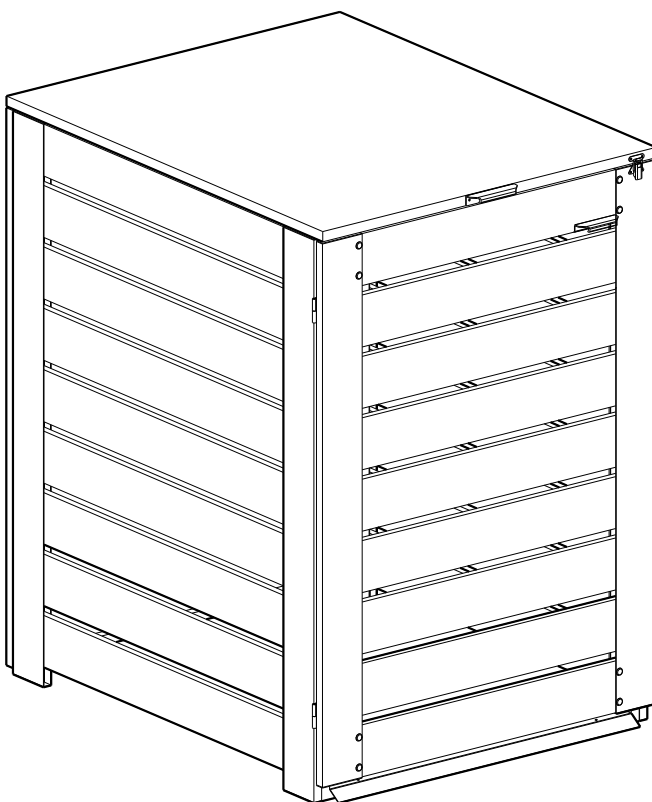

• [Facebook](#) • [Twitter](#) • [Instagram](#) • [Pinterest](#) • [@paragonoutdoorcompany](#)

Paragon Outdoor LLC

Customer Service Contact Information: 1-877-782-4482
support@paragon-outdoor.com

Before the Installation

Paragon Outdoor's 4 Year Limited Warranty

Warranty Conditions

1. This warranty shall be valid only if the product is installed, cleaned, handled and maintained in accordance with Paragon Outdoor's written recommendations listed below.
2. Without derogating from the above, damage caused by use of force, incorrect handling, inappropriate use neglectful use or assembly or maintenance, accidents, impact from foreign objects, vandalism, pollutants, alteration, painting, connecting, gluing, sealing not in accordance with the user's manual, or damage resulting from cleaning with incompatible detergents and minor deviations of the product are not covered by this warranty.
3. This warranty does not apply to damage resulting from "force majeure", which includes but is not limited to, hail, storm, tornado, hurricane, blizzard, flood, or fire effects, beyond stated claims.
4. This warranty is void if structural parts and components used are not compatible with Paragon Outdoor's written recommendations.
5. This warranty applies to the original owner and registrant and is non-transferable.

Warranty Duration	Extended Warranty
4 years	+ 1 year

*Extended warranty is applied when product is registered on www.paragon-outdoor.com within 1 month of purchase.

Care and Cleaning

For all products:

1. After rinsing with water, wipe all surfaces dry.
2. After rain or snow, promptly remove all water, snow, leaves and debris from the top, gaps and drainage areas to prevent long-term water exposure.

Customer Service Contact

If you are experiencing any issues with the assembly of your new structure, please do not return – our expert customerservice team will help you with all questions for a smooth assembly process.

Email: support@paragon-outdoor.com

Call: +1 (877)782-4482














Hours of Operation

Speak with an Expert Customer Service Agent: Monday – Friday: 8:00 am – 5:00 pm CST


Spare Part List

PREPARE ALL THE NECESSARY TOOLS

To assemble your new Paragon Outdoor product properly and safely, make sure you have the following tools and accessories on hand, as these are not included.


						Already included	
	Protective gloves		Hammer		Tape measure		Box cutter
					Hammer drill		Cordless screwdriver
						Phillips bit	
						Wrench	
A1	X1	B2	X1	C1	X1	D1	X1
							
E1	X1	F1	X1	FD1	X1	G1	X1
							
Q1	X2	Q2	X2	Q3	X2	Q4	X1
							
Q5	X1	Q6	X1	Q7	X2	Q8	X1
							
Q9-1	X2	Q9-2	X2	Q10	X2	Q11	X1
							
Q12	X2	Q13	X1	Q14	X1	Q15	X1
							
Q17	X1						
S1	X4	S2	X18	S3	X16	S4	X18
							
M8X80		3.9X32		M5X16		M5X16	
							
						3.9X13	

Exploded Assembly Drawing

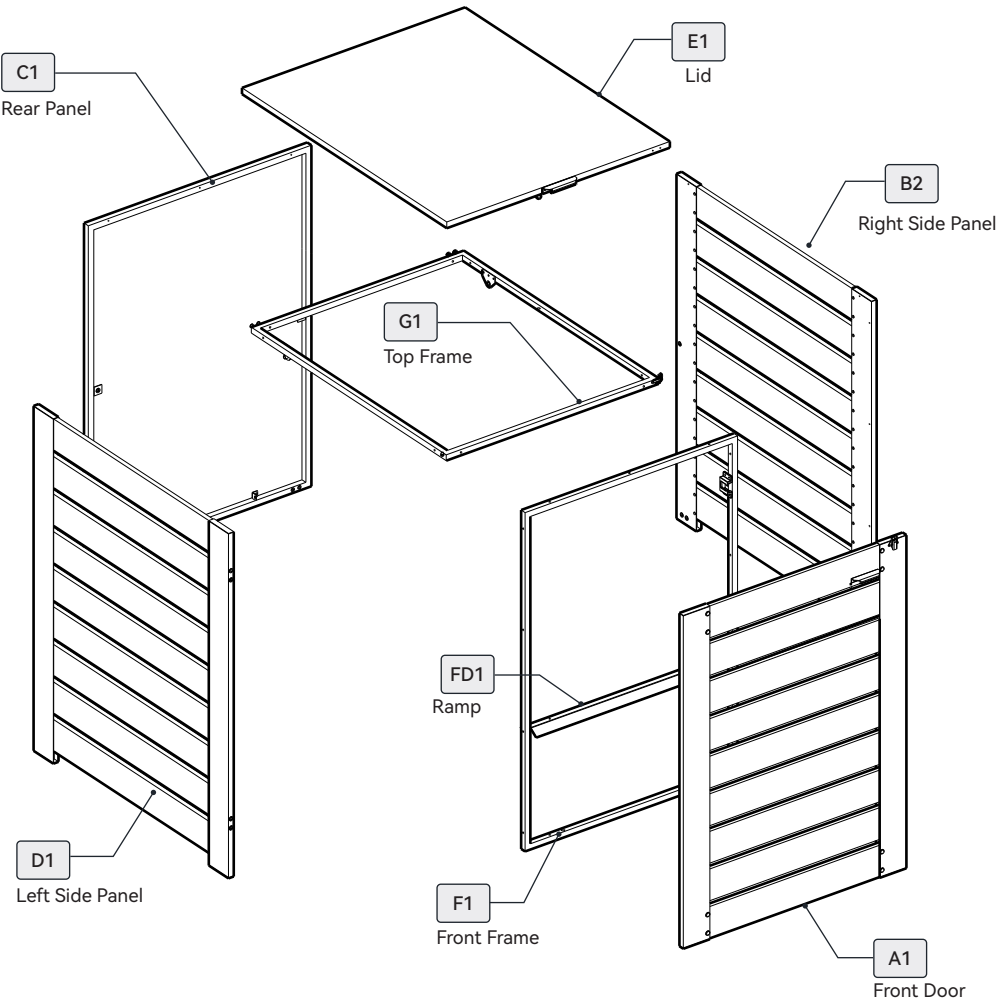


DIMENSIONS

Height	48"
Width	33"
Depth	41"
Capacity	Up to 1X96 US Gallons trash bin

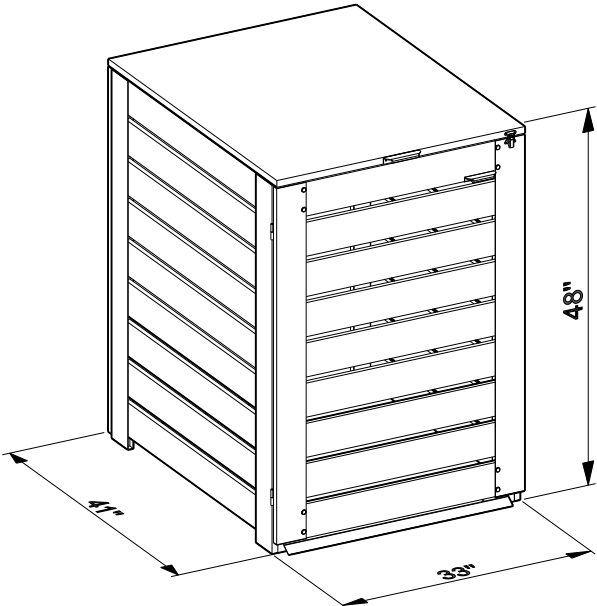

1

Q2 X2



Q3 X2





S4 X12



M5X16



Do not fully tighten any screws at this step until all screws are in position and make sure panels are aligned on the top.


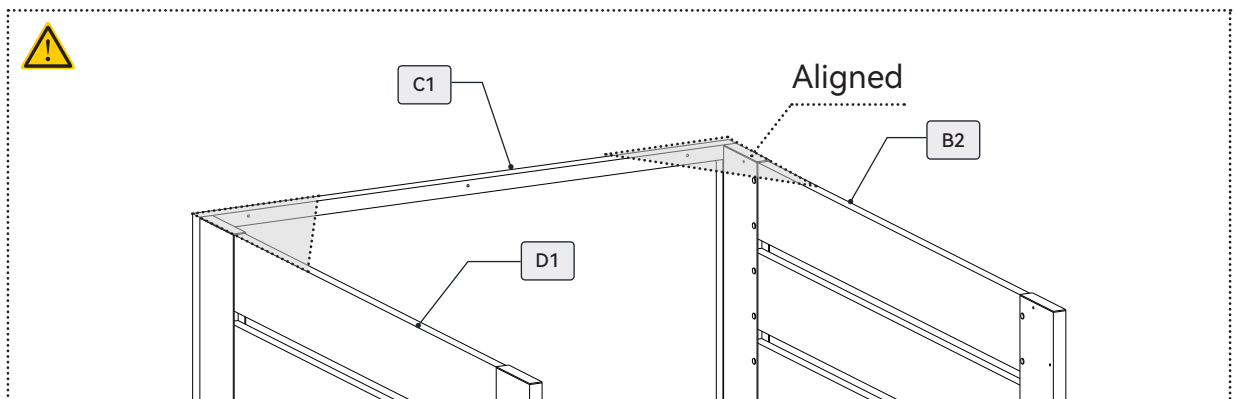
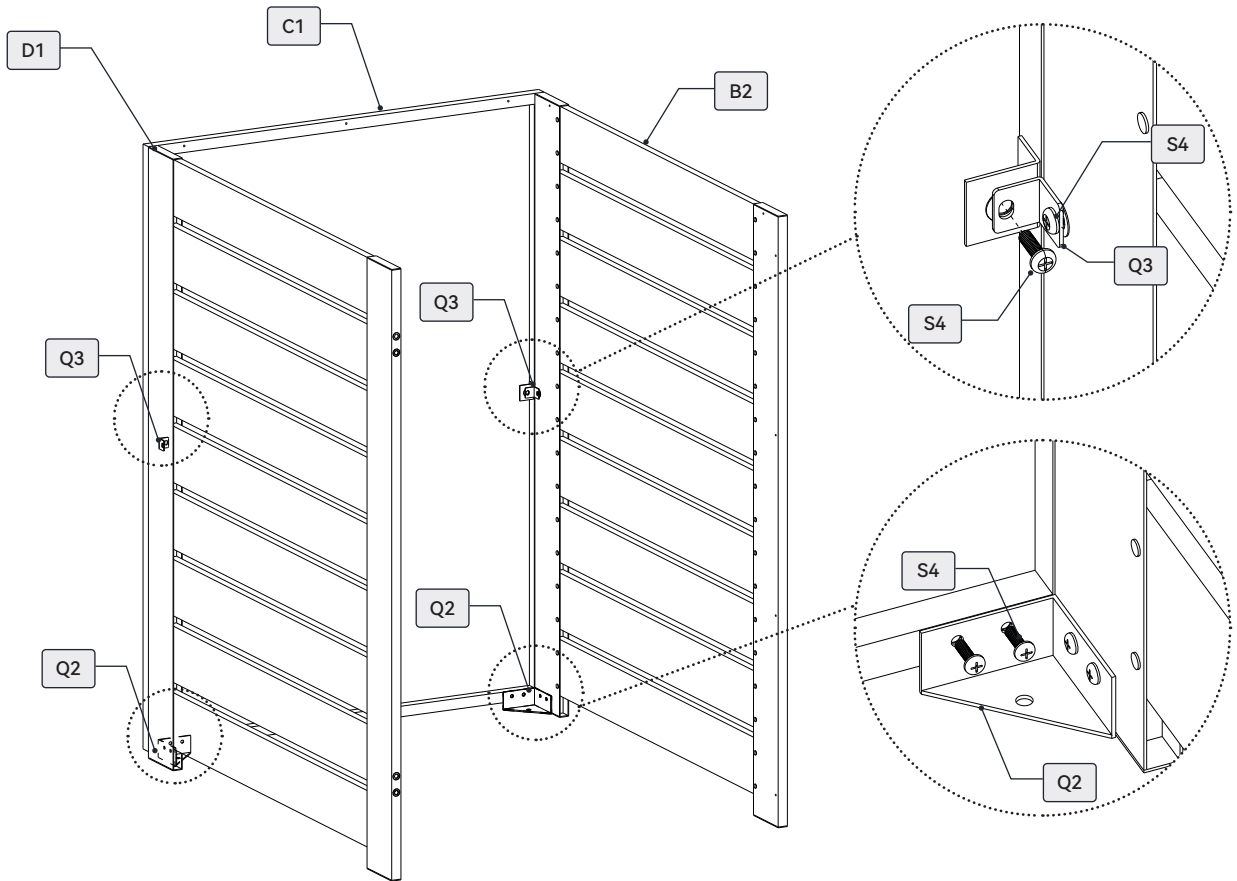


2



S2 X6
3.9X32





Note the 'UP' mark on G1 and F1 to make sure they are in the right direction.

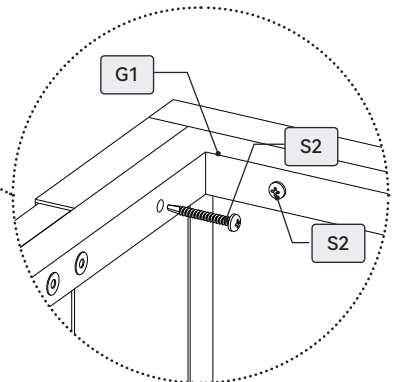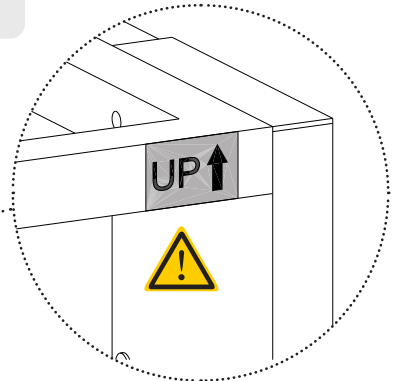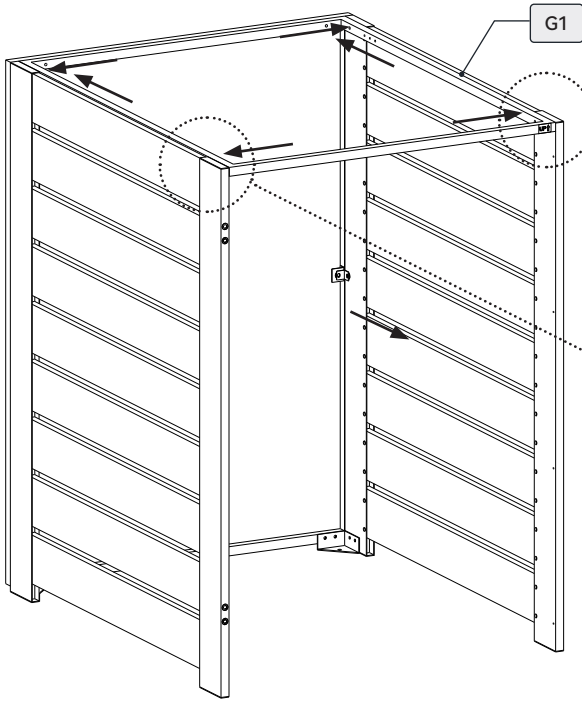



S2 X11
3.9X32

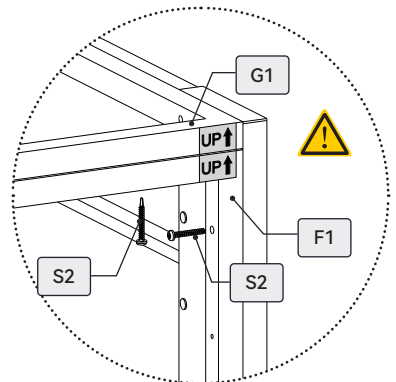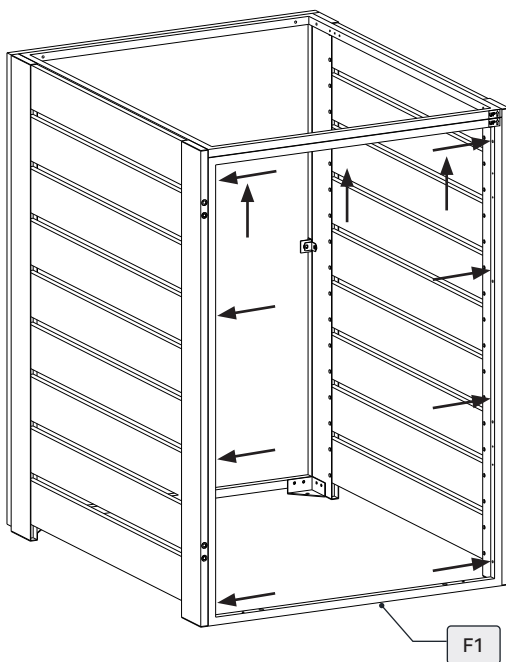

 Q1 X2	 Q9-2 X2	 Q11 X1	 Q14 X1	 S3 X4 M5X16	 S4 X6 M5X16	 S5 X4 3.9X13
---	---	--	--	--	--	---

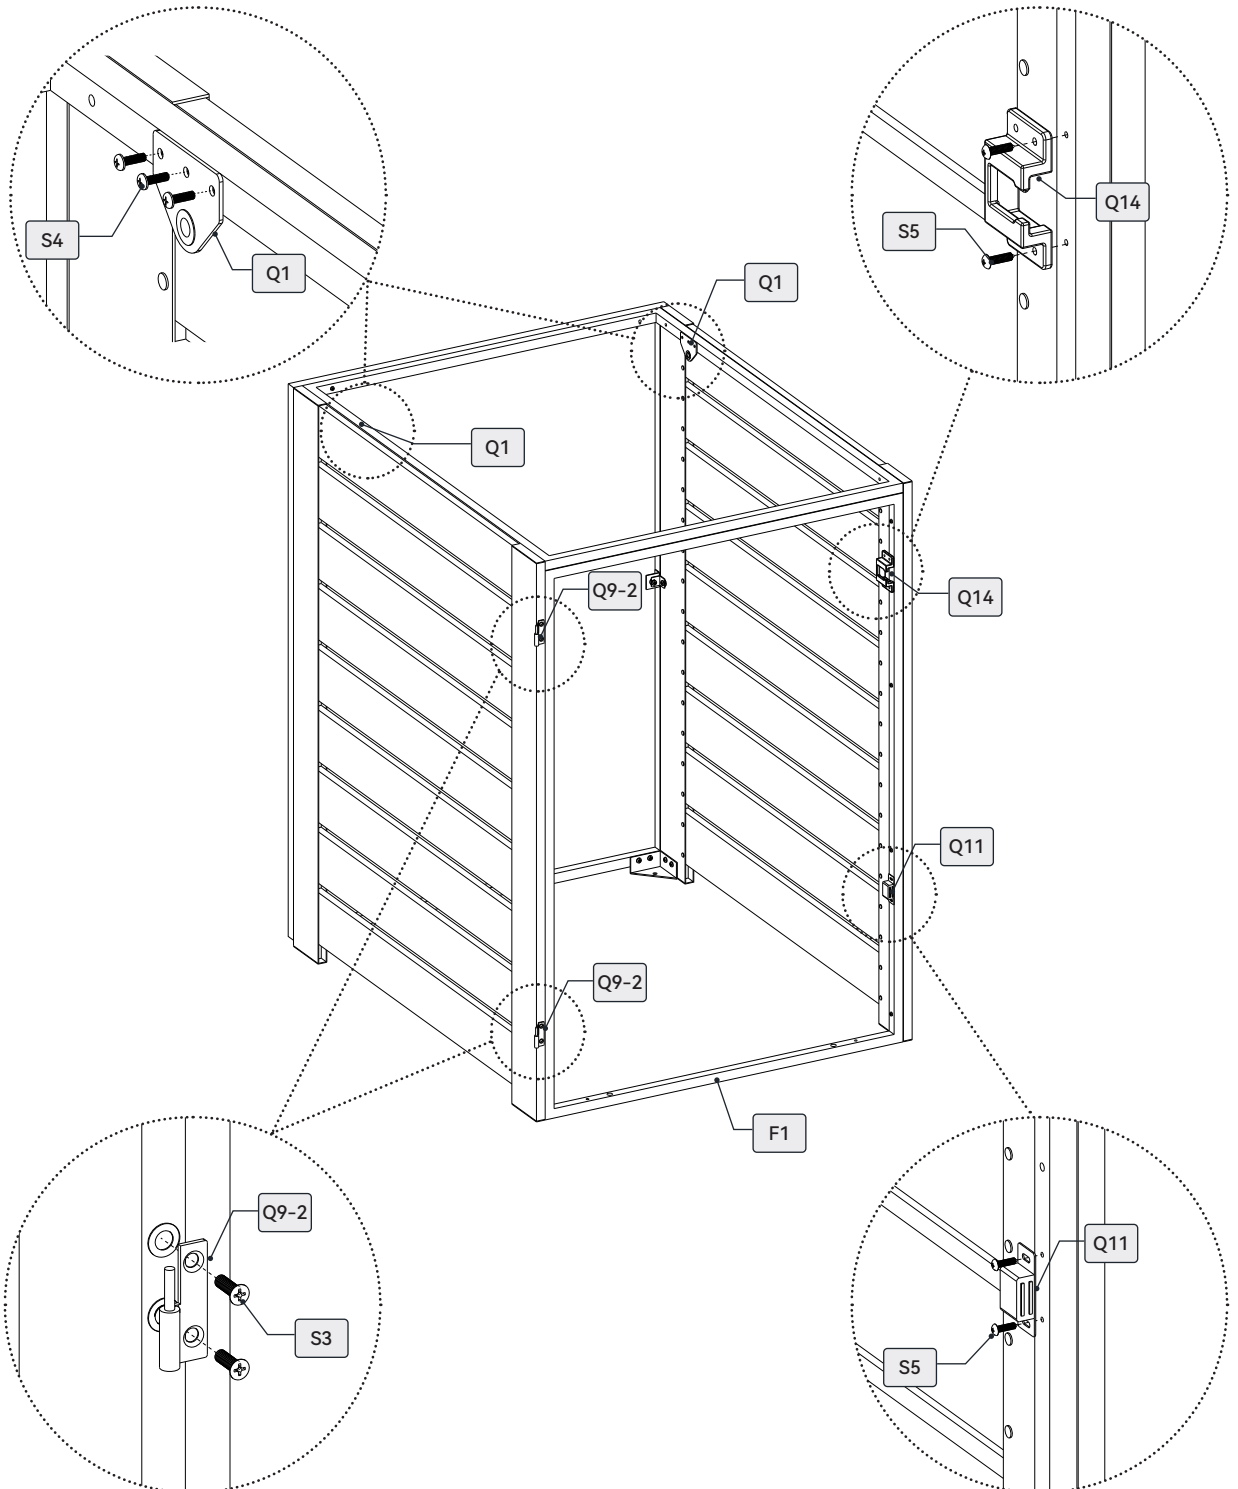


Q10 X2

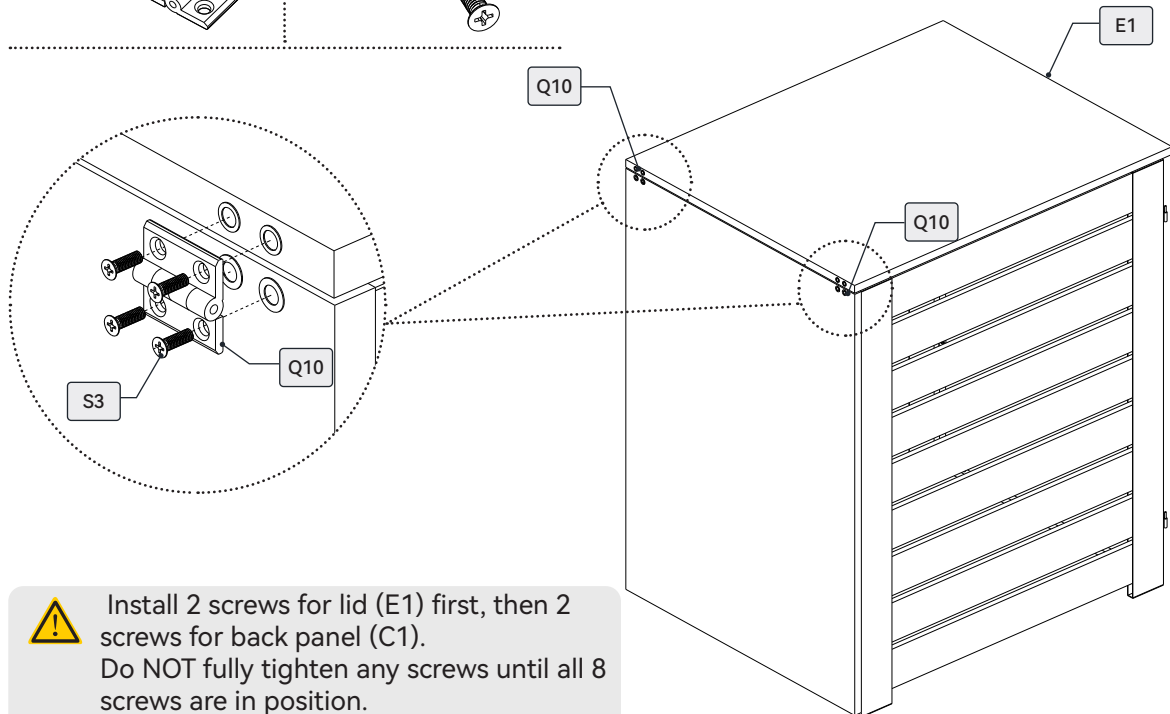
S3 X8
M5X16



Install 2 screws for lid (E1) first, then 2 screws for back panel (C1).
Do NOT fully tighten any screws until all 8 screws are in position.


Q7 X2



Install the gas spring. complete Step 1 (lid assembly) first, then to Step 2 (side assembly).

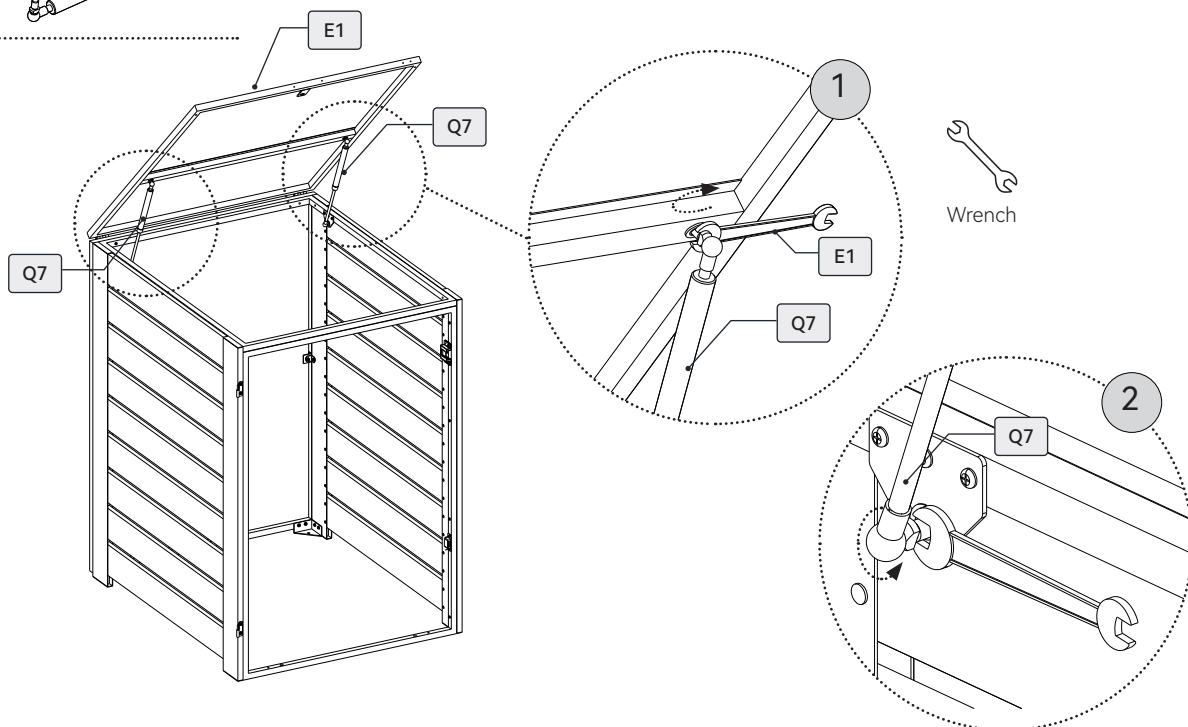

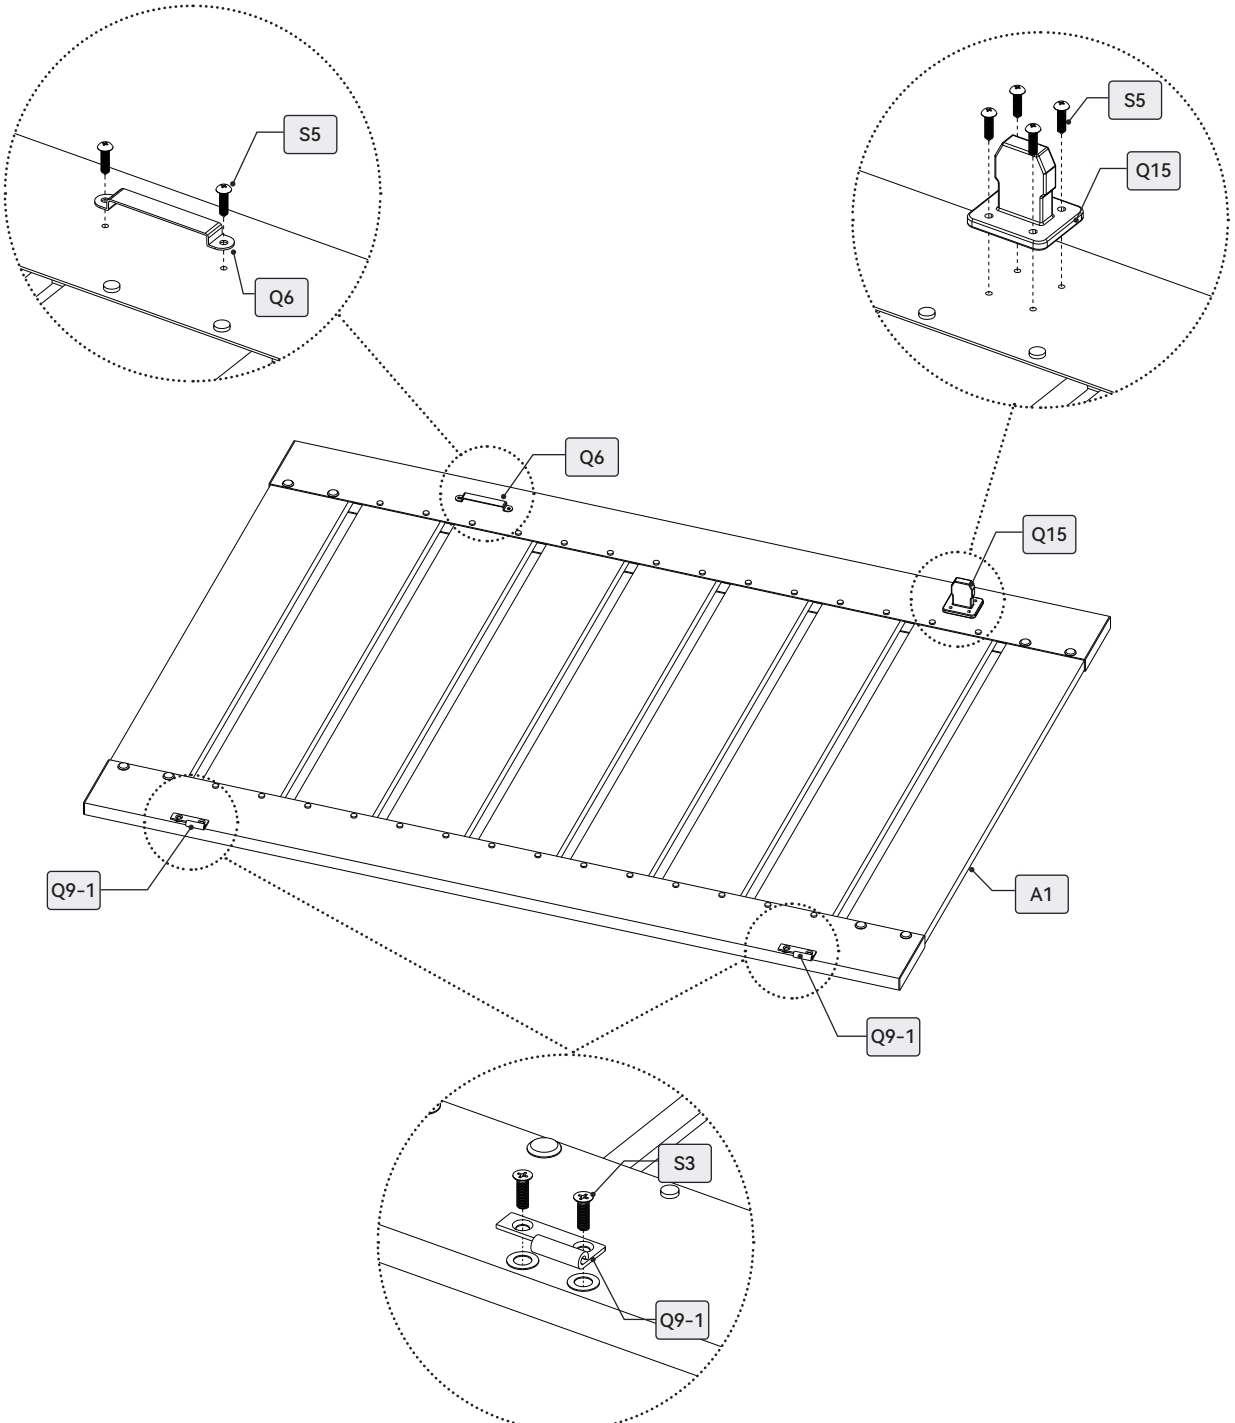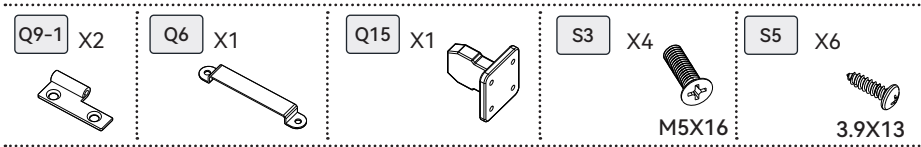


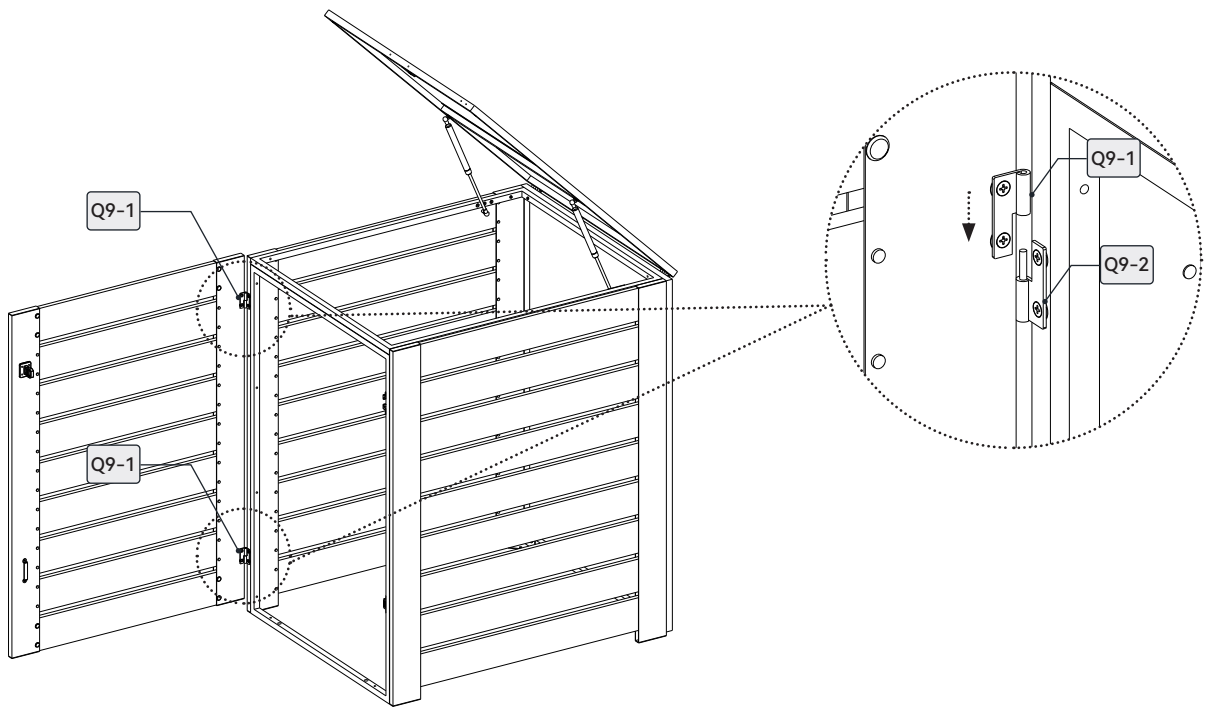

Q12 X2



Q13 X1

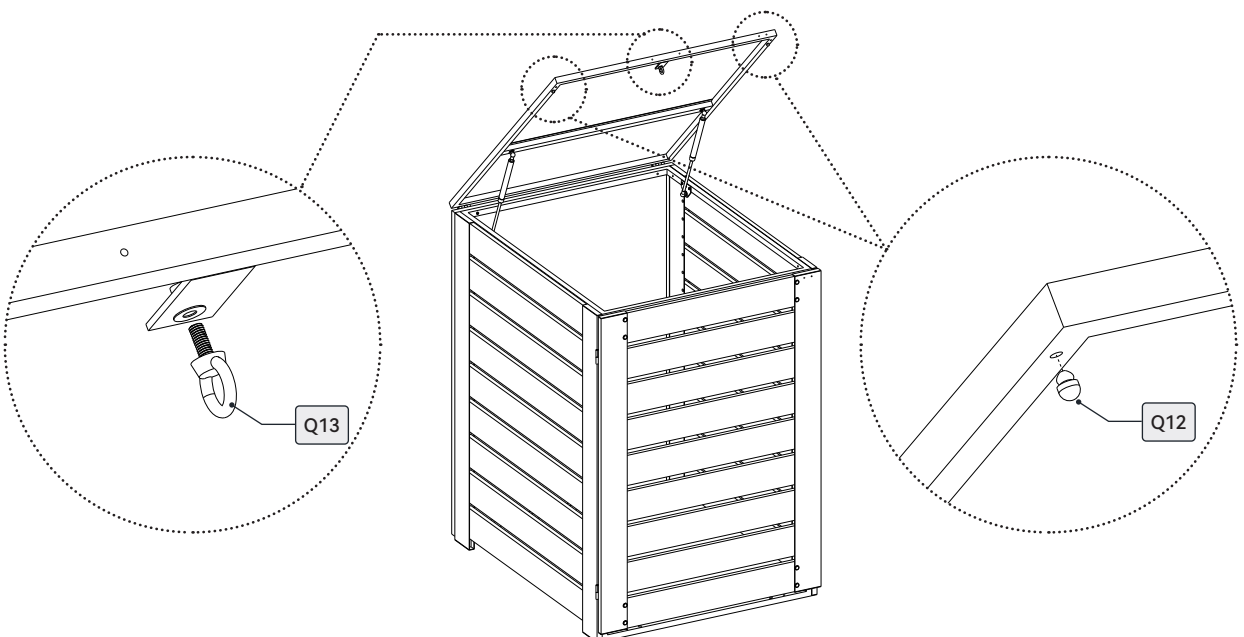





S1 X10



M8X80

This product is supposed to be installed on a level surface. If installed on a non-level surface, the door may not open or close smoothly.


In this case, you can adjust the height by placing rubber pads at the corner (purchased separately) until the product is level.

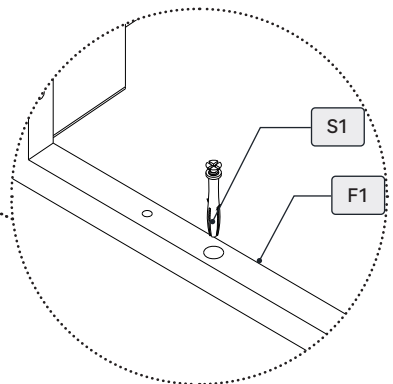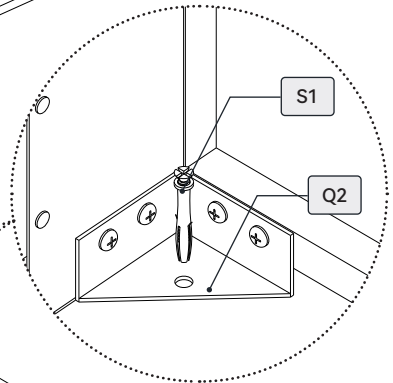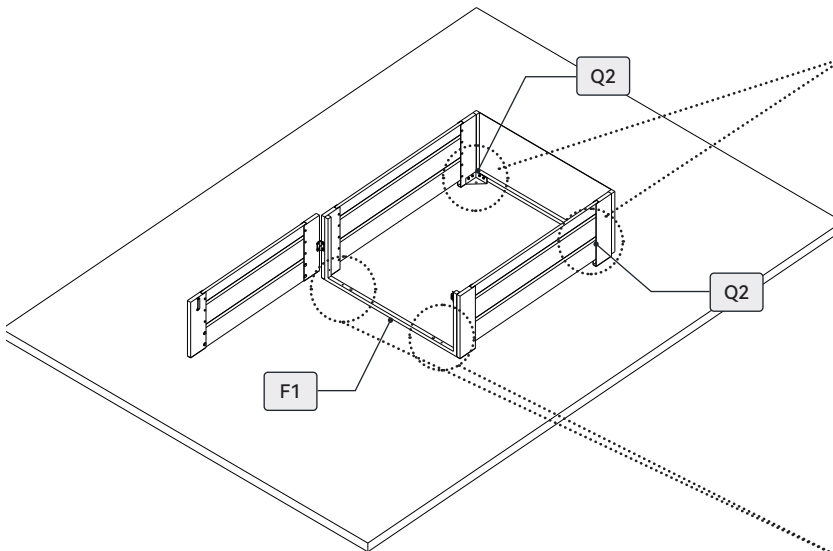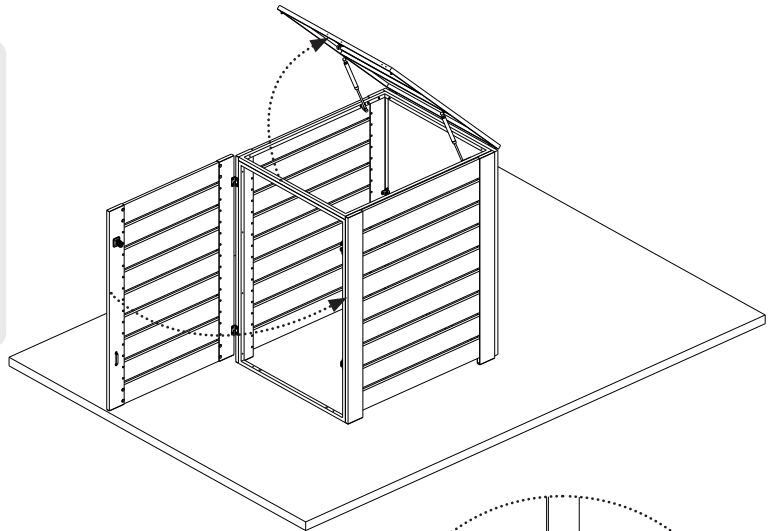

After leveling, expansion screws can be installed as needed.






5/16 Inch




Foundation concrete thickness shall be greater than 4"mm, drilling depth shall be 3"mm.

S5 X2

3.9X13

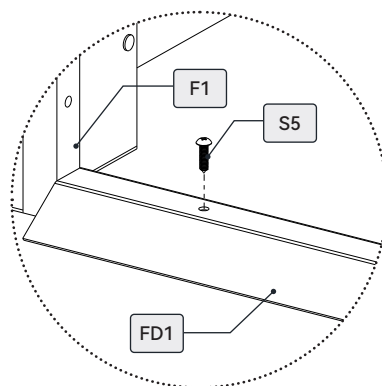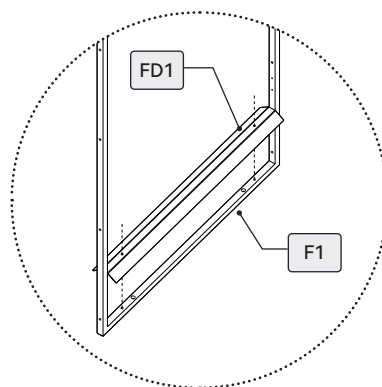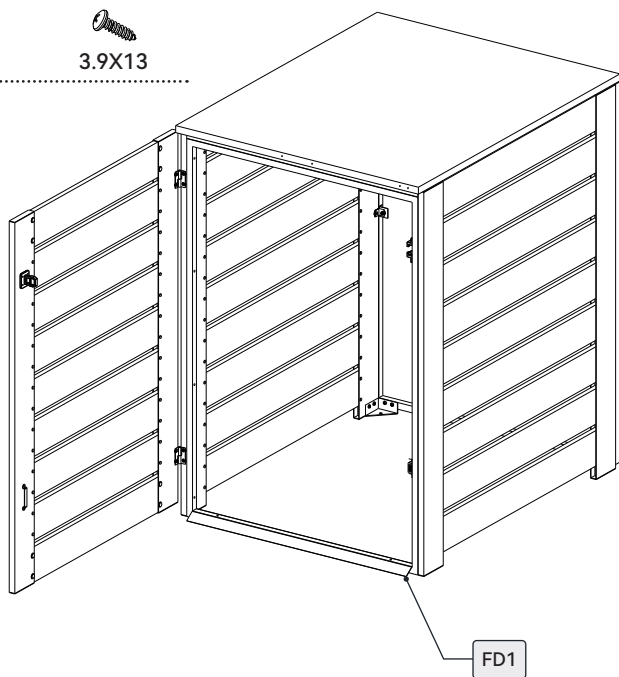

Q4 X1



Q5 X1








Q8 X1





S5 X9

3.9X13

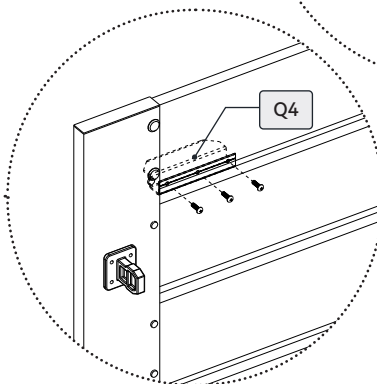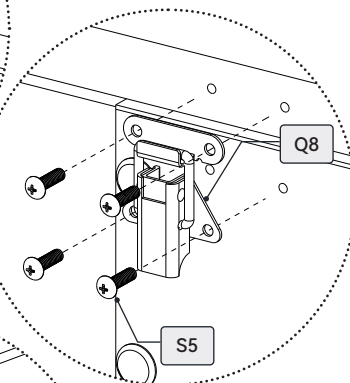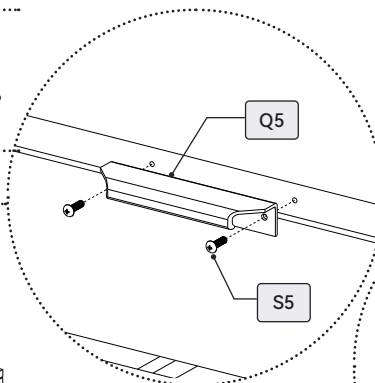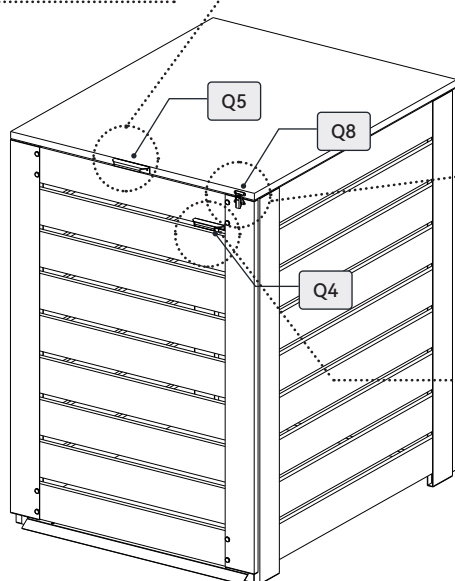

Q17 X1

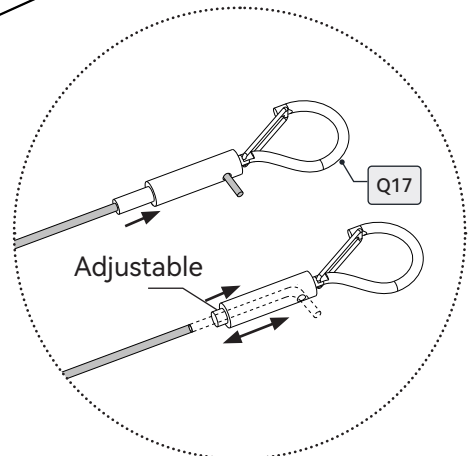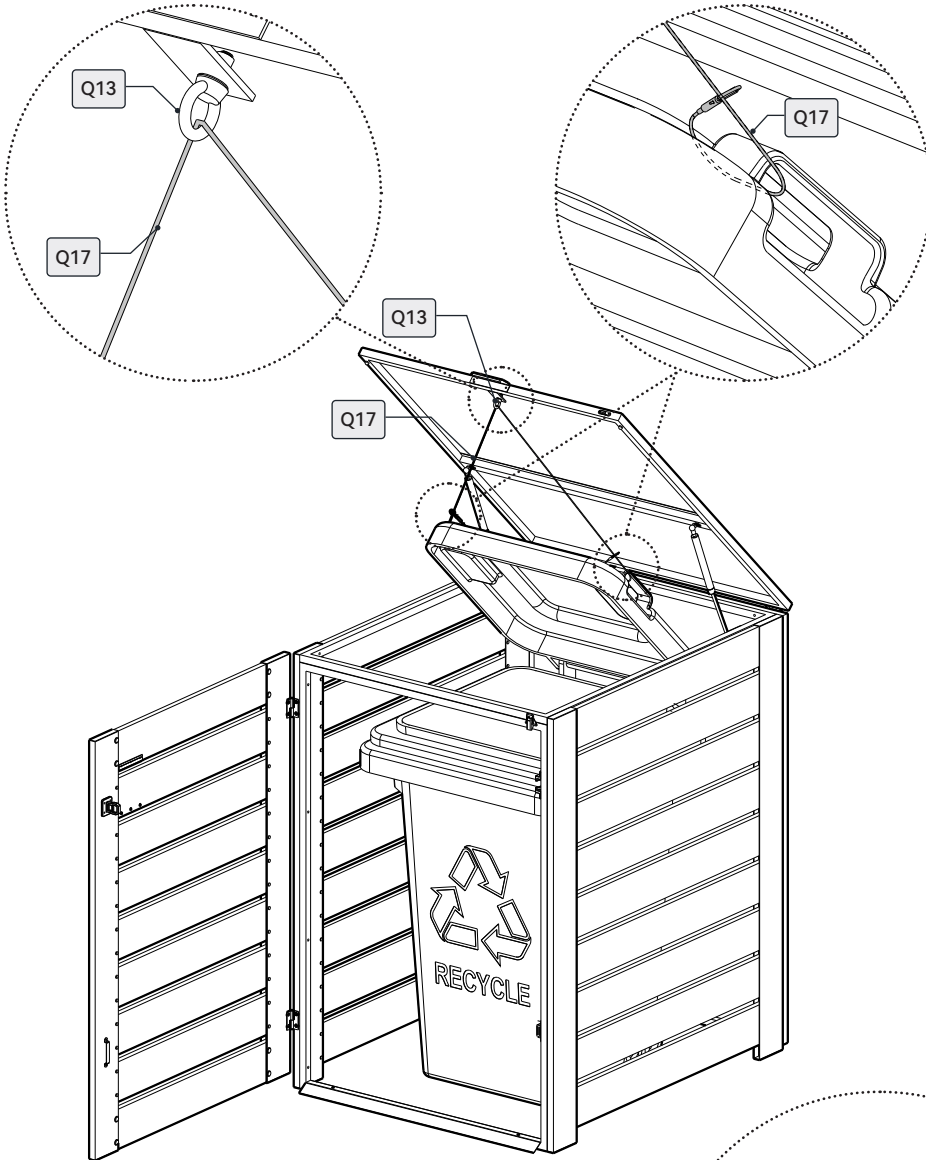



 @paragonoutdoorcompany

Paragon Outdoor LLC

Customer Service Contact Information: 1-877-782-4482
support@paragon-outdoor.com